

Graboflex Terrana 01/ECO



4265-252 • 3 m



4121-260 • 2,5 / 4 m



4345-255 • 2,5 m



4138-251 • 2,5 / 4 m



4265-254 • 3 m



4173-256 • 3 m



4101-263 • 3 / 4 m



4585-254 • 3 m

Graboflex Terrana 01/ECO



4204-271 • 4 m



4158-254 • 4 m



4271-272 • 3 m



4327-251 • 2,5 m

Technical parameters	Units	Standards	Terrana 16	Terrana 22	Grabo Sound	Graboflex Terrana 01/ECO
Thickness	mm	EN ISO 24346	1,20	2,20	3,40	2,70
Wear layer	mm	EN ISO 24340	0,15	0,15	0,40	0,15
Dimensional stability	max %	EN ISO 23999	±0,20	±0,20	±0,30	±0,20
Classification	class	EN 685	21	21	32 / 41	21
Width of rolls	m	EN ISO 24341	2 / 3 / 4	3 / 4	4	2,5 / 3 / 4
Length of rolls	lm		18-33	18-27	18-23	18-27
Total weight	kg / m2	EN ISO 23997	1,25	1,30	2,70	1,40
Residual indentation	max. mm	EN ISO 24343	0,35	0,35	0,20	0,35
Fire resistance		EN 13501-1	Cfl-s1	Cfl-s1	Bfl-s1	Cfl-s1
Impact sound reduction	DLw (dB)	EN ISO 717-2	13	14	18	16
Light fastness	grade	EN ISO 20105 B02	6	6	6	6
Slip resistance	class	EN 13893	DS	DS	DS	DS
Warranty	year		3	5	5	5



CLEVER



Terrana 16



4259-276-4 • 3 m



4266-251-4 • 2 / 3 / 4 m



4304-258-4 • 2 m




4310-259-4 • 3 / 4 m



4345-286-4 • 2 m



4345-255-4 • 3 / 4 m

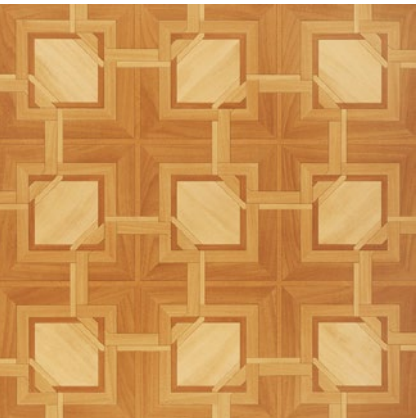

4138-251-4 • 4 m

Terrana 16



4246-272-4 • 4 m



4306-270-4 • 4 m



4136-253-4 • 3 / 4 m



4261-257-4 • 2 / 3 m

Terrana 22



4311-276-4 • 3 m



4259-283-4 • 4 m



4305-274-4 • 4 m




Grabo Sound



4292-472-4 • 4 m

- Chemical and mechanical engloss / Transparens wear layer
- Kémiai és mechanikai sérülésektől védő réteg / Átlátszó réteg

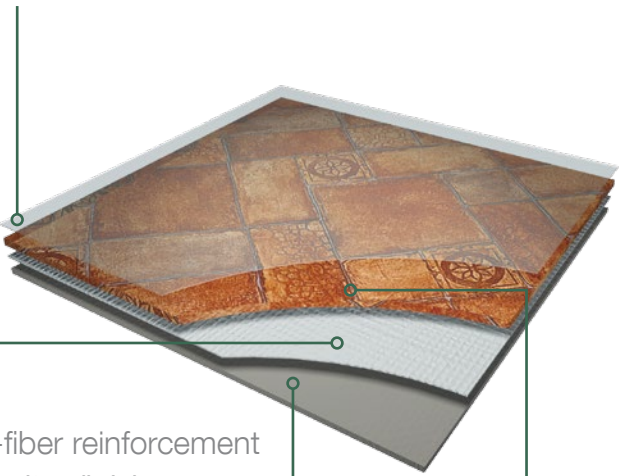

- Glass-fiber reinforcement / Üvegszál erősítés
- Color painting layer / Színezett réteg
- Foam backing / Hátoldali hab