












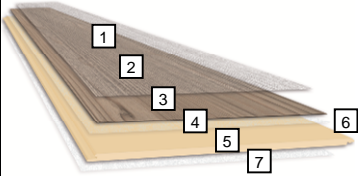











TECHNICAL CHARACTERISTICS

PURLINE Organic Flooring wineo 1000 Permanently elastic polyurethane flooring according to EN 16776 free of chlorine, solvents and plasticizers				
 to click	wineo 1000 wood	wineo 1000 stone		
Format	1295 x 195 mm	859 x 397 mm		
Product thickness	5 mm	5 mm		
Weight	9 kg/m ²	9 kg/m ²		
Planks / m² per box	8 / 2.02 m ²	6 / 2.05 m ²		
Boxes/ m² per pallet	48 / 96.96 m ²	48 / 98.40 m ²		
Guarantee	10 years – Guarantee for private use according to Windmüller warranty conditions – www.wineo.de			
Classification				
 Utilization class 23 Heavy-duty use in the domestic area EN ISO 10874	Corridors, living rooms, kitchens, home offices	1	Surface texture various embossings	
 Utilization class 32 Normal use in the commercial sector EN ISO 10874	Offices, boutiques, cafés	2	Top layer Polyurethane	
 Wear resistance EN 660-2	Group T	3	Decor Decor paper	
 Reaction to fire EN 13501-1	C _{fl} - s1	4	Stabilisation Glass fibre reinforcement	
 R9 Anti slip category DIN 51130	R 9	5	Base layer Polyurethane	
 Slip resistance EN 13893	μ ≥ 0.30 – DS	6	Profile connection Connect technology 	
 Anti-static properties EN 1815	≤ 2 kV	7	Backing Glass fibre reinforcement	
 Staining and chemical resistance EN ISO 26987	Very good resistance according to the concentration and residence time		 windmüller flooring products WFP GmbH Nord-West-Ring 21 D-32832 Augustdorf - 16 - Polyurethan Bodenbelag DOP: 2001001 EN 14041:2004 1658   Elastischer Bodenbelag zur Verwendung in Innenräumen.	
 Light fastness EN ISO 105-B02	≥ 7			
 Residual indentation EN ISO 24343-1	~ 0.05 mm			
 Effect of a furniture leg EN 424	Foot type 0 – no visible damage			
 Castor chair test EN 425 / ISO 4918	Type W – no visible change			
 Thermal resistance ISO 8302	0.01 (m ² K)/W			
 Impact sound reduction EN ISO 10140	~ 6 dB			
 Dimension stability EN ISO 23999	~ 0.10 %			
 DER BLAUE ENGEL weil emissionsfrei schenkt UMWELT und GESUNDHEIT				

Relevant Information:

- Underfloor heating: Suitable for all conventional hot water underfloor heating and electrical systems regulated up to a surface temperature of 27 °C.
- Cleaning and care: See separate cleaning & care instruction.
- Technical subjects can be changed by windmüller flooring products WFP GmbH.