


Signal v provisionnally

1/10" lussenpool bedrukt	1/10" bouclé imprimé	1/10" Schlinge bedrukt	1/10" loop pile printed
100% polyamide	100% polyamide	100% Polyamide	100% polyamide
RUG Vilt	DOSSIER Feùtre	RÜCKEN Vlies	BACKING Feltback
POOLHOOGTE ± 2 mm	HAUTEUR DU VELOURS ± 2 mm	POLHÖHE ± 2 mm	PILE HEIGHT ± 2 mm
TOTALE HOOGTE ± 4 mm	HAUTEUR TOTALE ± 4 mm	GESAMTHÖHE ± 4 mm	TOTAL HEIGHT ± 4 mm
POOLGEWICHT ± 220 g/m²	POIDS DU VELOURS ± 220 g/m²	POLGEWICHT ± 220 g/m²	PILE WEIGHT ± 220 g/m²
TOTAAL GEWICHT ± 1.050 g/m²	POIDS TOTAL ± 1.050 g/m²	GESAMTGEWICHT ± 1.050 g/m²	TOTAL WEIGHT ± 1.050 g/m²
AANTAL NOPPEN/M² ± 177 000	NOMBRE DE POINTS/M² ± 177 000	NOPPEN/M² ± 177 000	TUFT DENSITY/M² ± 177 000
AANBEVOLEN LEGWIJZE • Universele fixeerlijm • Verhuislijm	POSE PRÉCONISÉE • Produit de maintien • Fixateur	EMPFOHLENE VERLEGEART • Universalfixierung • Wiederaufnahmeklebstoff	INSTALLATION METHOD • Release bond
GEBRUIK • Klasse 22: Gemiddeld huishoudelijk • Comfort: 1* • Brandkl. E _{fl} EN 13501-1 • Geschikt v. vloerverwarming	UTILISATION • Classe 22: domestique modéré • Confort: 1* • Classement feu E _{fl} - EN 13501-1 • Compatible avec sol chauffant • Résistance thermique ISO 8302: 0.11 m ² K/W	EINSATZ • Klasse 22: mittel • Komfort: 1* • Baustoffkl. E _{fl} EN13501-1 • Geeignet f. Fussbodenheizung • Wdw. ISO 8302: 0.11 m ² K/W	USAGE • Class 22: medium domestic • Comfort: 1* • Fire resist. E _{fl} EN13501-1 • Suitable f. floorheating

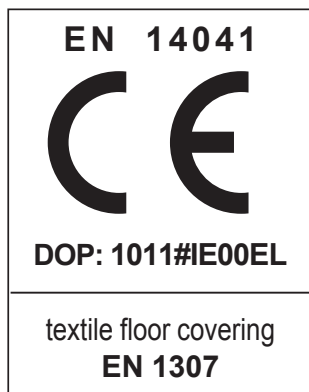


Onder voorbehoud van wijzingen van de technische specificaties - Sous réserve de modifications techniques - Unter Vorbehalt von technischen Änderungen - All rights reserved to alter technical specification

↔ 97,5 cm ↑ 93 cm


Signal	25	33	44	53	64	74	84	93
ca 4m	•	•	•	•	•	•	•	•



Signal v

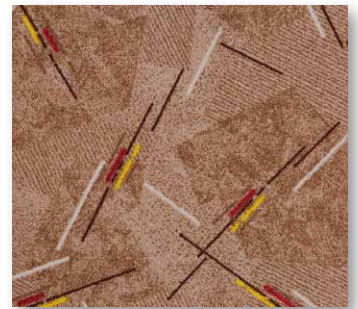


33

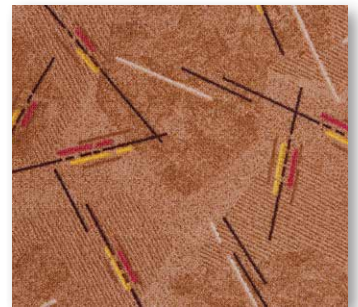


53




64

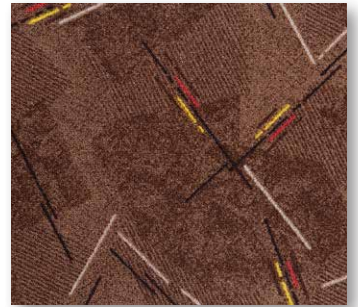


44




93



25



74

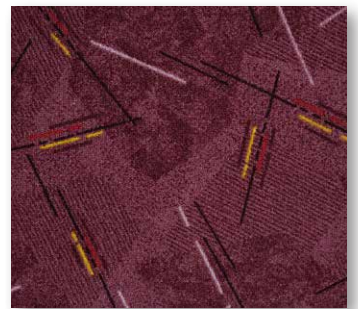

84